


# MODEL 404

## BELT-DRIVEN LIVE ROLLER



735 Industrial Loop Road • New London, WI 54961-9612  
 920-982-6600 • Fax 920-982-7750 • Toll Free 800-558-3616  
 Website: [www.titanconveyors.com](http://www.titanconveyors.com) • Email: [sales@titanconveyors.com](mailto:sales@titanconveyors.com)

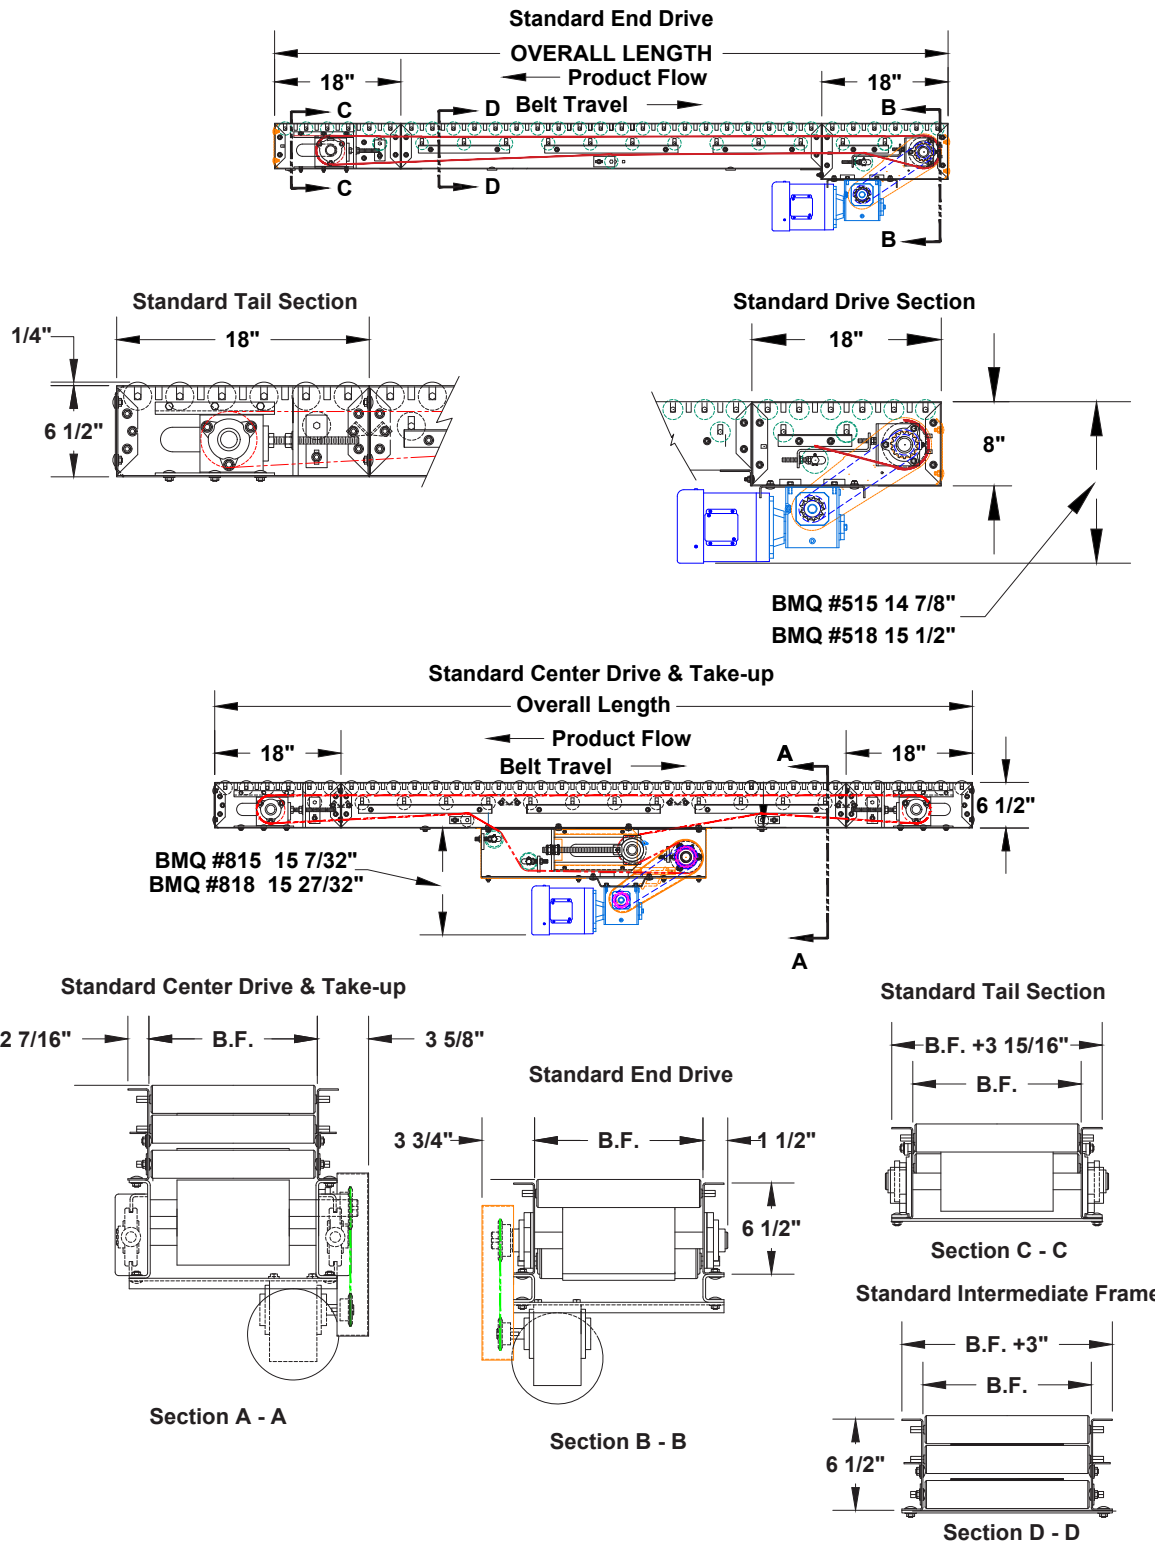

# MODEL 404

## BELT-DRIVEN LIVE ROLLER CONVEYOR



The Titan **Model 404 Belt-Driven Live Roller Conveyor** features all of the time proven design features that you've come to expect from Titan. Standard Features include 4" diameter drive and tail pulleys, grease sealed industrial 3 bolt flange bearings, heavy duty formed 12 gauge frame and a P.V.C. drive belt. The Model 404 uses 1.9 diameter x 16 gauge rollers with 7/16" spring loaded hex shaft and grease-packed bearings. Standard roller centers are 6" with optional 3" and 4 1/2" centers. Compression rollers are also 1.9 x 16 gauge and mounted on 6" centers. Standard between frame widths start at 13" and range to 41".



### BELT DRIVEN LIVE ROLLER CONVEYOR SPECIFICATIONS

	Standard	Options
BF Dimensions	13", 16", 19", 22", 25", 28", 31", 34", 37", 41"	Specify
Lengths	3' Min. to 100' Max.	
Roller Size	1.9" x 16 ga. with 7/16" hex axle	
Roller Centers	6"	3", 4-1/2"
Belt Type	PVC 120	
Frame	6 1/2" deep formed 12 ga.	
Drive	1/2 H.P. 230/460/3/60	3/4, 1, 1-1/2, 2 HP , TEFC, severe duty, inverter duty, brake motor
Drive Pulley	4" dia. crown faced rubber lagged	

#### OPTIONAL

Belt Type, Drives - Fixed speeds-specify speed req., variable speed with DC motor and SCR controller or AC inverter, Motor , Controls, Internal take-up, Center drive, 1", 3 1/2", 6", 8". 12" side rails available, Adjustable side rails, Casters - 4' or 6" rigid, Side mount drive, Knee braces/ceiling hangers, Bolt on bottom pans, Rollers centers, Transfer roller, End stop, Accumulation, Galvanized or Stainless steel construction

**NOTE: Specifications subject to change without notice**