


Industrial Conveyor Specialists

Conveyors for Ammunition Manufacturers

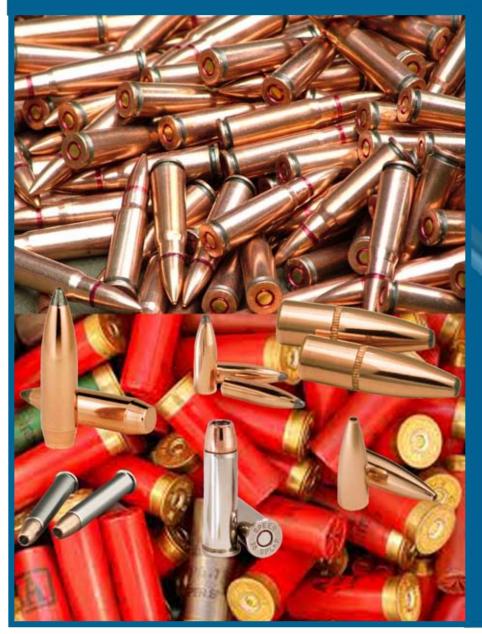

Proven Reliability
Low Maintenance
Quick Delivery

Designed for years of maintenance free operation in hostile environments

The TITAN Experience - Expect More

Phone: 800-558-3616

Website: www.titanconveyors.com

Slider Bed Conveyors

Model 102 MINI-PRO Press Conveyor to solve small part or scrap handling problems





The MINI-PRO has a 1 1/2" low profile frame that will easily fit under most die parallels to quickly remove scrap or finished parts. A KNURLED 2" diameter drive pulley provides positive belt pull under extremely oily conditions. MINI-PRO's narrow frame width (belt width plus 1/2") is unique for this type of conveyor. A bottom mounted drive is furnished as standard but a top mounted drive arrangement is optional. Other optional features available are vertical or flared siderails to suit your application, supports as required, different belt types and special belt speeds. Standard belt widths from 2" to 24" wide, with lengths from 2' to 10' maximum as standard.

Model 104 Slider Bed Belt is designed with the systems approach in mind

The Model 104 Slider Bed Belt is designed with the systems approach in mind. The square head and tail end terminals allow you the flexibility to combine this unit with other Titan units to assure a continuous flow of material. The standard 4" deep formed 12 gauge frame allows integration with several other types of conveyors available from titan. Screw type take-ups and 4" diameter crown face pulleys are some of the standard design features. Modular design allows you the flexibility to add additional sections if required. You material handling requirements can be solved by the experts at Titan.



	Standard	Options
Belt Widths	12", 18", 24", 30", 36"	4", 6", 8", 10", 14", 16", 20", 40"
Lengths	5' min. to 40' max	3' min to 50' max
Belt Type	PVC 120 Black	Rough top, food grade, V-guide on bottom, belt to fit application
Drive	1/2 HP 230/460/3/60	3/4, 1, 1-1/2, 2 HP, 115/2301/60, 575/3/60, TEFC, washdown, severe duty, invertrer duty, brake motor
Drive Pulley	4" dia. crowned, rubber lagged	Machined & balanced pulleys for high speed
Frame	4" deep formed 12 ga.	
rranie	' · ·	l Optional

H.P., drive location, speed; fixed or variable speed, controls, belt type, center drive & take-up, galvanized, stainless, siderails, transfer roller, V-guide,, supports, casters, other belt types, siderail skirting, special paint

Many other options available, consult factory representative

Model 350 Pro-Feed Parts Conveyor

Feed almost any type of part imaginable-easily and jam free with the Titan "Pro Feed" Parts feeder. "Pro Feed" will accept almost any size or type of part.

MODEL 350 "PRO FEED" SPECIFICATIONS				
	Standard	Options		
Belt Width	12"	Specify Belt With		
Discharge	6' 0" off floor	Specify discharge height		
Belt Type	2-/2" pitch hinged steel			
Drive	1/2 H.P. 230/460/3/60	Drive to suit application		
Hopper	7 cu. ft.	Custom hoppers available		
Frame	Formed 10 ga.			
OPTIONAL				

Discharge heights, discharge chute, belt widths, belt type, speed, variable speed, controls, drive, galvanized, stainless, casters, paint, Hopper size - Consult factory





Special discharge chute




Shell Casings loaded on belt from hopper



Custom hopper for delicate parts

Cleated Belt Parts Conveyor

Titan Cleated Belt Conveyors are available in a variety of models to suit

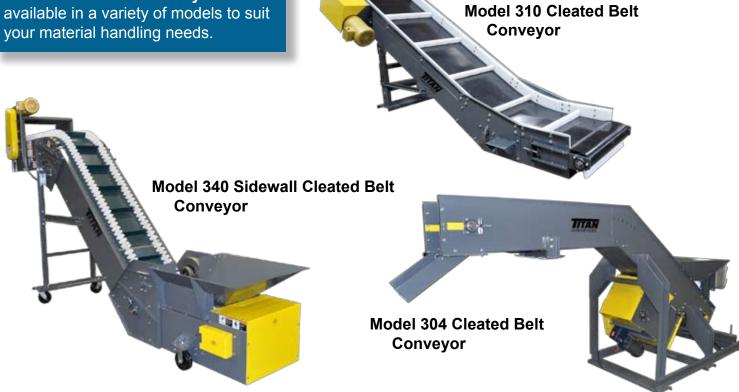

Plastic Belt Conveyors



Titan engineering will work with you to customize any standard conveyor to solve your bulk handling problems. Our innovative engineering will provide you with an economical and practical solution.

AUTHORIZED DISTRIBUTOR





735 Industrial Loop Road, New London, WI 54961-2600

Phone: (920) 982-6600Fax: (920) 982-7750

• Toll Free: 1-800-558-3616

Website: www.titanconveyors.comEmail: sales@titanconveyors.com