



MODEL 208


FLOOR TO FLOOR SLIDER BED

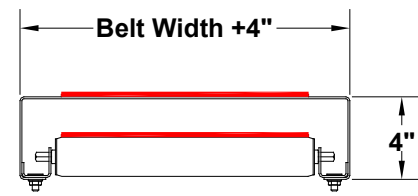


Standard Frame Cross Section

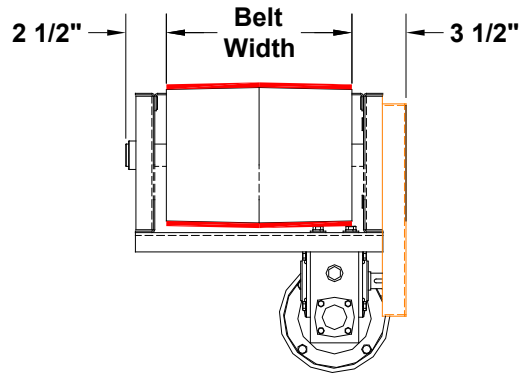

Standard Drive Cross Section

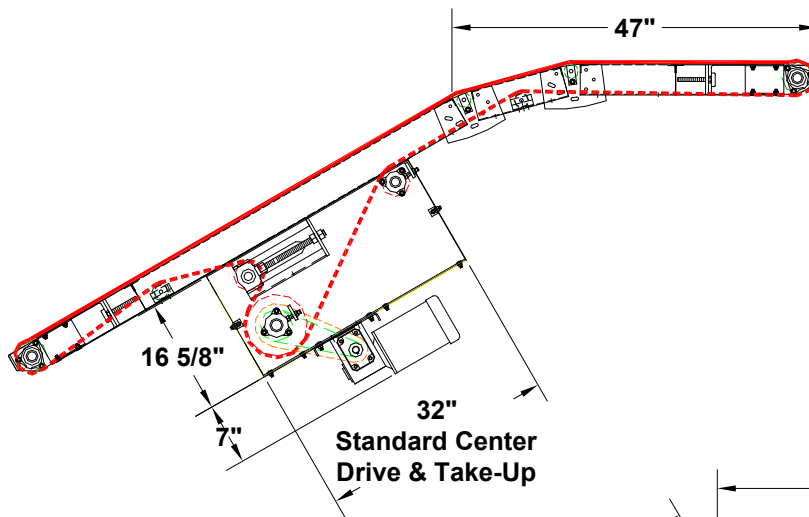

Standard Center Drive & Take-Up

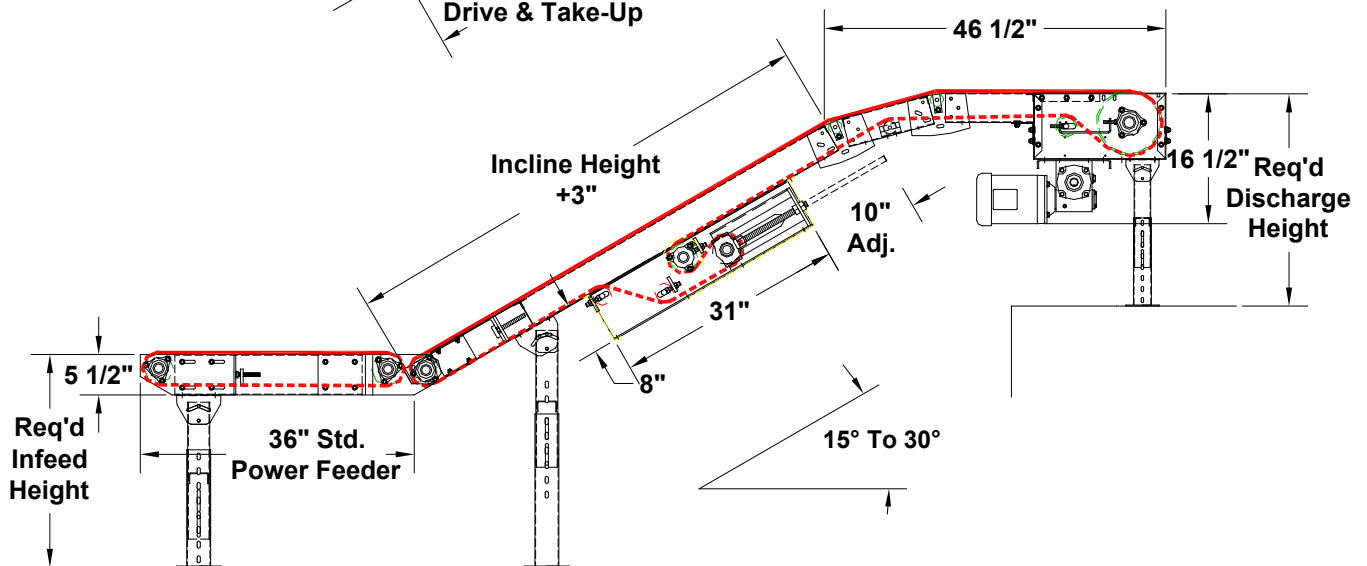

Incline Height +3"

36" Std. Power Feeder

16 1/2" Req'd Discharge Height

15° To 30°



735 Industrial Loop Road • New London, WI 54961-9612 • 920-982-6600 • Fax 920-982-7750 • Toll Free 800-558-3616

Website: www.titanconveyors.com • Email: sales@titanconveyors.com



MODEL 208
FLOOR TO FLOOR SLIDER BED



If a rugged, industrial material handling system is required, consider using the Titan Model 208 Floor to Floor Slider Bed conveyor in your system. The heavy-duty 8" diameter rubber lagged (vulcanized) drive pulley gives that extra capacity for heavier loads and longer incline sections. The optional 3' long power feeder adds flexibility for in-line flow of your product. The standard double noseover is adjustable up to a 30° incline. The Titan Model 208 has all of the rugged design features of our proven Model 108 slider Bed and standard optional equipment is available but if your application requires special modification, Titan Industries is willing and happy to accommodate your requirements.

MODEL 208
SPECIFICATIONS

DRIVE:.....3/4 H.P. 230/460/3/60
BELT SPEED:..... 60 F.P.M.
BELT: Black Rubber Rough Top
FRAME: 4" Deep Formed 12 Gauge
PULLEYS:8" Diameter Crown Face Rubber Lagged Drive
4" Diameter Crown Face Take-up
BEARINGS:..... Grease Sealed
SUPPORTS:..... "H" Type Adjustable
PAINT:..... One Coat Industrial Enamel

NOTE: Specifications subject to change without notice