

## Industrial Conveyor Specialists

## Chip Conveyors









Designed for years of maintenance free operation in hostile environments

The TITAN Experience - Expect More

Phone: 800-558-3616

Website: www.titanconveyors.com




STANDARD SPECIFICATIONS 2-1/2" PITCH HINGED STEEL BELT MODELS		
	MODEL 610	MODEL 620
Drive	1/2 H.P. 230/460/3/60	1/2 H.P. 230/460/3/60
Belt Speed	10 F.P.M.	5 - 50 F.P.M.
Frame	6-11/16" deep formed 12 ga.	7" deep formed 10 ga.
Belt	2-1/2" pitch radial sidewing	2-1/2 pitch low profile or radial sidewing
Belt Width	4" to 24"	4" to 48"
Supports	Structural steel	Structural steel
Curves	30°, 45°, 60°	30°, 45°, 60°
OPTIONS		

Drive location, H.P., fixed and variable speed, tanks, chutes, plumbing, top covers, chip suppressors, casters, liquid tight bottom pans, special paint, Belt: belt widths, pimpled, perforated, welded barrels, impact plates, wiper cleats, cleat heights, sidebars on narrower belts

Many other options available, consult factory representative

## MODEL 620 · Hinged Steel Belt Conveyor

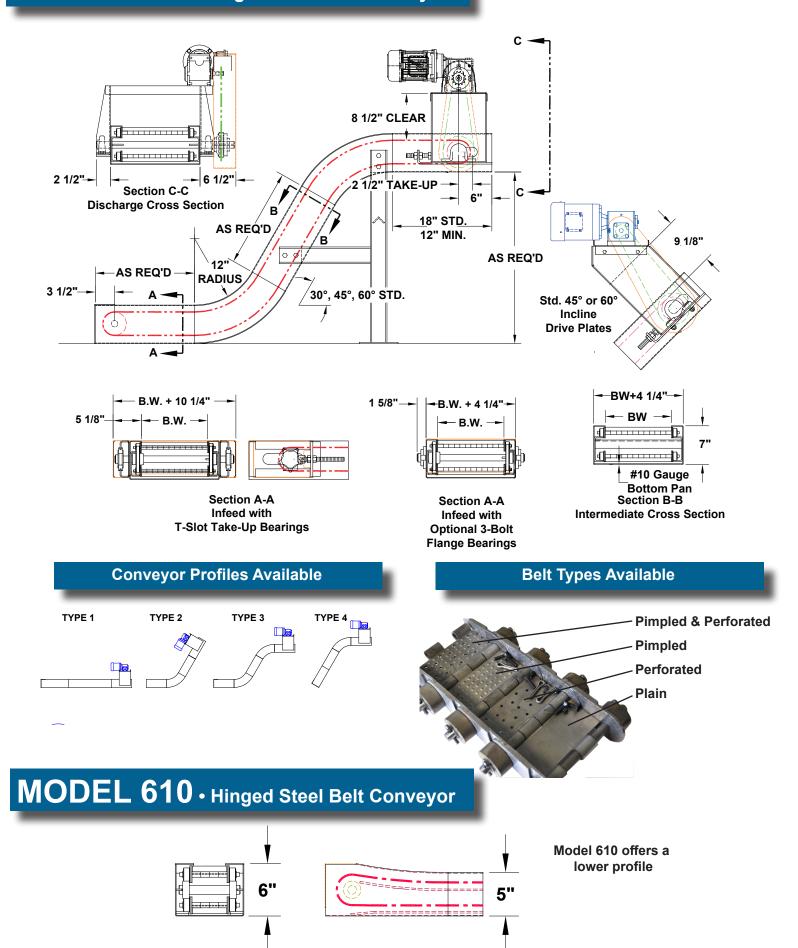

**Bulb Infeed Available** 

## **Available Solutions**

Titan Conveyors offers a complete line of cost effective Options and Accessories to help you with the challenges you face in your industry. Contact our customer service representatives for more details.



Fixed Siderails



Reinforced Siderails



Flared Siderails



Plastic Belts



Impact Plates



Wiper Cleats



Cleats



**Divided Belts** 



**Discharge Chutes** 



Hoppers



**Top Covers** 



Step Plates



**Quench Tanks** 



Drain Plug



Zero Speed Switches



Controls



**Bottom Mount Drive** 



Side Mount Drive



Top Mount Drive



Titan Conveyors 735 Industrial Loop Road New London, WI 54961 Phone: 800-558-3616

Website: www.titanconveyors.com Email: sales @titanconveyors.com